
POLY-CLASSIC® CRAFTSMAN TAPERED CAP AND BASE STYLES

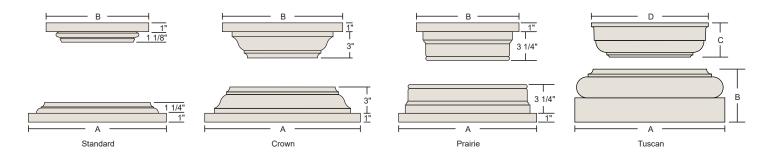

Column nominal bottom width	Standard				Crown				Prairie				Tuscan *			
	Base		Сар		Base		Сар		Base		Сар		Base		Cap **	
	Width	IIIsiue	Width	Inside width	Width (A)	Inside width	Width (B)	Inside width	Width (A)	Inside . width	Width	— Illiside	Width	Height	Width	Height
	(A)		(B)								(B)		(A)	(B)	(D)	(C)
10"	13 %"	5 %"	9 %"	3 %"	15 %"	5 %"	11 %"	3 %"	13 %"	5 %"	9 %"	3 %"	13 ½"	5 1/4"	9 ½"	3 9/16"
12"	15 %"	7 %"	11 %"	3 %"	17 %"	7 %"	13 %"	3 %"	15 %"	7 %"	11 %"	3 %"	17"	6"	13"	3 %"
16"	19 %"	11 %"	15 %"	3 %"	21 %"	11 %"	17 %"	3 %"	19 %"	11 %"	15 %"	3 %"	20 %"	7 ½"	17 ¾"	5"
20"	23 %"	13 %"	17 %"	3 %"	25 %"	13 %"	19 %"	3 %"	23 %"	13 %"	17 %"	3 %"	24 %"	7 ½"	20 1/4"	5"
24"	27 %"	15 %"	19 %"	3 %"	29 %"	15 %"	21 %"	3 %"	27 %"	15 %"	19 %"	3 %"	28 %"	7 ½"	22 ¾"	5"

^{*} Tuscan cap/base have no platform—they wrap around the shaft. For inside widths, see the specifications for shaft inside widths.


** Tuscan cap widths may vary depending on height of shaft. The pitch (side angles) change and may require adjustment of cap width.

Note: The total height of the parts (shown in the charts) do NOT add to the overall height of the column. The bottom and top plates do add 1" each (2" total) to the shaft height, allowing extra flexibility in installation.

The cap and base sets for tapered Craftsman Series columns consist of a platform and a molding. The platforms are factory cut in a "V" shape to allow easy installation around an existing load support. This "V" is re-assembled using the jointer bis-cuits (included), PVC cement or polyurethane glue, and nails or screws. (As with all exterior products, noncorrosive fasteners must be used, such as double hot-dipped galvanized screws or nails.) This same "V" cut construction is used for the top platform of Craftsman pedestals. Pedestals being used as newels may be ordered without the platform being "V" cut. In addition to the standard profile cap and base set, optional Crown, Prairie and Tuscan styles are available. These styles allow customers more freedom of choice when designing their columns, and may be mixed and matched as desired. Custom options may be possible as well, based on customer requirements.

For columns of non-standard size, the widths of the cap and base will adjusted ac-cordingly. The heights however will remain the same.

The inside widths shown below refer to the cutout in the center of the platforms. In cases where the cap platform is open at the top, flashing must be used to prevent water and debris from getting inside the column. Edge view of "V" cut - shows where the iointer biscuits install:

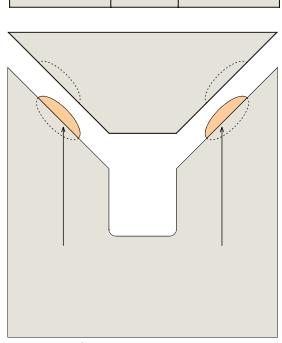

Plan view of "V" cut - shows jointer biscuit recessed into edge