

A History of Architectural Excellence

So many architects and builders select Turncraft Architectural Columns because they feature thoughtful product design, fine workmanship, superior assembly, precision turning and fluting, and artful finishing. Round columns may be ordered with true architectural entasis in sizes consistent with the classic proportions of the Greek Doric, Tuscan, Roman Doric, Ionic, and Corinthian Orders, or in custom shaft diameters up to 36" and lengths to 30'. They can be smooth surfaced or given dramatic deep fluting (with increased stave thickness) as desired. Greek Doric Columns feature classic edge-to-edge fluting. Square columns and pilasters may be ordered to match (available in tapered or non-tapered and in various plan styles—see page 14). Non-tapered cylinders are available for use in casework, radius wall corners, and contemporary applications.

The making of Turncraft Architectural columns is an exacting process. Finger-jointed or solid staves are milled to the required dimensions, assembled using



the strongest Type-I waterproof glue, and then are metal-banded for curing. In the computer-controlled lathe, the assembled shaft is turned to the precise taper desired, complete with true architectural entasis. The top of each column is profiled according to the style specified, and the entire column is machine sanded to ensure a smooth finish. Flutes are milled at precisely determined intervals and depths, always ending in full half-rounds at the top and bottom (except on Greek Doric). Each column, regardless of size, is visually inspected, any defects are corrected, and then it is finish sanded.



Turncraft exterior columns and paint-grade interior columns are fashioned from select, kiln-dried Western Pine staves (or clear, all-heart Redwood or Western Red Cedar by custom order). Use of finger-jointed pieces conserves valuable wood resources, reduces potential for warping and bow, and helps prevent checking or cracking of finished surfaces.

(Solid-stave assembly available by custom order.)

Stain-grade interior
columns are fashioned
primarily from solidstave Red Oak,
Poplar, Hard
Maple, Pine,
Cherry, Redwood,
Mahogany,
and Black
Walnut lumber
and feature
matching wood
Caps & Bases.















All paint-grade wood shafts and Caps & Bases are fully immersed in Woodtreat® MB wood preservative, formulated to protect against mold, mildew, and staining and decaying fungi; to control shrinking, swelling, end checking, splitting, grain raising, and warping; and for maximum compatibility with paint primers and topcoats. (Conforms to Industrial Standard IS4-00, is approved by the N.W.W.D.A., and meets all current and proposed government standards.)



The volute scrolls of the Ionic, Erectheum, Scamozzi, and Empire imitate the helix crosssection of the Nautilus shell. The Acanthus leaves on the Temple of Winds and Corinthian Capitals echo the flowering crown of a tree. These capitals are crafted from a number of materials including wood, plaster, and fibers and are shaped into the appropriate proportions for the various styles of architecture and sizes of column shafts.



	Temple	of Wind:	s
Bottom		Cap	Abacus
Shaft Dia.	Style	Height	Width
6"	TW06P	7"	8"
8"	TW08P	7-1/2"	10-1/2"
10"	TWI0P	10-1/8"	14-1/2"
12"	TWI2P	11-3/8"	16-1/2"
14"	TWI4P	14"	21"
16"	TWI6P	16-1/2"	22-1/2"
18"	TWI8P	18-3/8"	25-3/4"
20"	TW20C	21-1/2"	28"
22"	TW22C	23-1/4"	34-1/2"
24"	TW24P	26"	30-3/4"
26"	TW26C	24"	35"
28"	TW28C	28"	37"
30"	TW30C	30"	39"

Rom	an Dor	ic Ornam	ental
Bottom		Сар	Abacus
Shaft Dia.	Style	Height	Width
6"	RD06P	4-1/8"	8-3/4"
8"	RD08P	6"	13-1/8"
10"	RD10P	6"	14-3/8"
12"	RD12P	7-1/8"	16-1/8"
14"	RDI4P	7-1/4"	17-1/2"
16"	RD16P	10-3/4"	23-1/2"
18"	RDI8C	12-1/2"	28"

3	En	npire	
Bottom		Сар	Abacus
Shaft Dia.	Style	Height	Width
6"	EM06P	3-1/2"	9"
8"	EM08P	3-7/8"	10"
10"	EMI0P	5-3/4"	14"
12"	EM12P	6-3/8"	17-1/2"
14"	EMI4P	7-3/8"	20-3/8"
16"	EM16P	8-1/2"	21-7/8"
18"	EMI8P	10"	30-3/4"
20"	EM20C	11-1/4"	34"
24"	EM24C	12-3/4"	35-1/2"

	(Oman (Corinthia	
Bottom		Сар	Abacus
Shaft Dia.	Style	Height	Width
6"	RC06P	7"	9-1/2"
8"	RC08P	8-7/8"	12-1/2"
10"	RC10P	11-5/8"	14-3/4"
12"	RC12P	14-5/8"	17-5/8"
14"	RCI4P	17-1/8"	22-1/2"
16"	RC16P	17-5/8"	23-1/2"
18"	RC18P	21-1/4"	27-1/2"
20"	RC20P	24-3/4"	38-1/2"
22"	RC22C	28-1/2"	42"
24"	RC24P	27-3/4"	42"
26"	RC26P	31-1/2"	41-1/4"
28"	RC28C	34"	46"
30"	RC30C	37-1/2"	46-1/2"

	Empire									
Bottom		Сар	Abacus							
Shaft Dia.	Style	Height	Width							
6"	EM06P	3-1/2"	9"							
8"	EM08P	3-7/8"	10"							
10"	EMI0P	5-3/4"	14"							
12"	EM12P	6-3/8"	17-1/2"							
14"	EMI4P	7-3/8"	20-3/8"							
16"	EM16P	8-1/2"	21-7/8"							
18"	EMI8P	10"	30-3/4"							
20"	EM20C	11-1/4"	34"							
24"	EM24C	12-3/4"	35-1/2"							
26"	EM26C	13"	37"							

Bottom		Сар	Abacus
Shaft Dia.	Style	Height	Width
6"	RC06P	7"	9-1/2"
8"	RC08P	8-7/8"	12-1/2"
10"	RC10P	11-5/8"	14-3/4"
12"	RC12P	14-5/8"	17-5/8"
14"	RCI4P	17-1/8"	22-1/2"
16"	RCI6P	17-5/8"	23-1/2"
18"	RC18P	21-1/4"	27-1/2"
20"	RC20P	24-3/4"	38-1/2"
22"	RC22C	28-1/2"	42"
24"	RC24P	27-3/4"	42"
26"	RC26P	31-1/2"	41-1/4"
28"	RC28C	34"	46"
30"	RC30C	37-1/2"	46-1/2"

Greek Angular Ionic									
Bottom		Сар	Abacus						
Shaft Dia.	Style	Height	Width						
8"	GA08P	4"	9"	_					
10"	GAI0P	6"	14-1/2"	_					
12"	GA12P	6"	17"	_					
14"	GAI4C	7-1/4"	20-3/4"	_					
16"	GAI6C	8-3/8"	20-1/2"	_					
18"	GAI8C	9-3/4"	24-1/4"	_					
20"	GA20C	11"	29-3/4"						
24"	GA24C	12-3/4"	35"						
28"	GA28C	14-3/4"	39-1/2"	_					
	Bottom Shaft Dia. 8" 10" 12" 14" 16" 18" 20" 24"	Bottom Shaft Dia. Style 8" GA08P 10" GA10P 12" GA12P 14" GA14C 16" GA16C 18" GA18C 20" GA20C 24" GA24C	Bottom Cap Shaft Dia Style Height 8" GA08P 4" 10" GA10P 6" 12" GA12P 6" 14" GA14C 7-1/4" 16" GA16C 8-3/8" 18" GA18C 9-3/4" 20" GA20C 11" 24" GA24C 12-3/4"	Bottom Shaft Dia. Style Shaft Dia. Cap Height Shaft Dia. Abacus Width Width Shaft Dia. 8" GA08P 4" 9" 10" GA10P 6" 14-1/2" 12" GA12P 6" 17" 14" GA14C 7-1/4" 20-3/4" 16" GA16C 8-3/8" 20-1/2" 18" GA16C 9-3/4" 24-1/4" 20" GA20C 11" 29-3/4" 24" GA24C 12-3/4" 35"					

	Scar	mozzi	
Bottom		Сар	Abacus
Shaft Dia.	Style	Height	Width
6"	SC06P	2-1/2"	7-3/4"
8"	SC08P	3"	10-1/4"
10"	SCI0P	4-1/4"	14-3/4"
12"	SCI2P	5"	16-1/4"
14" 16"	SCI4P	5-3/4"	18-1/2"
	SCI6P	5-3/4"	21-3/8"
18"	SC18P	7-1/2"	24-1/4"
20"	SC20P	7-1/4"	25-3/8"
24"	SC24P	11-1/4"	34-1/2"
26"	SC26C	11"	35-1/2"
28"	SC28C	12-3/4"	39"
30"	SC30C	12-3/4"	39"

Bottom		Сар	Abacus
Shaft Dia.	Style	Height	Width
6"	GE06P	3-1/4"	6-3/4"
8"	GE08P	3-3/4"	7-3/4"
10"	GEI0P	5-5/8"	12"
12"	GEI2P	7"	15-1/2"
14"	GEI4C	6-5/8"	14-1/2"
16"	GEI6C	9"	17-1/2"
18"	GEI8C	10"	22-1/2"
20"	GE20C	11"	26"
22"	GE22C	11-1/4"	26"
24"	GE24C	13"	30-1/2"
26"	GE26C	13"	32-1/2"
28"	GE28C	15"	31"
30"	GE30C	15"	31"

Greek Erectheum

Roman Ionic										
Bottom		Сар	Abacus							
Shaft Dia.	Style	Height	Width							
6"	RI06P	2-1/4"	6-1/4"							
8"	RI08P	3-5/8"	8"							
10"	RIIOP	4"	11-1/2"							
12"	RII2P	4-3/4"	12-1/2"							
14"	RII4P	5-1/2"	17-1/2"							
16"	RII6P	6-1/4"	18"							
18"	RII8P	6-1/2"	21"							
20"	RI20C	8-3/4"	25"							
22"	RI22C	8-3/4"	25"							
24"	RI24C	9"	25-1/4"							
26"	RI26C	9-1/2"	26-1/2"							
28"	RI28P	9-3/4"	27-1/4"							
30"	RI30P	12-1/2"	32"							

Plaster Ornamental Capitals are coated with boiled linseed oil and turpentine as a temporary protector until they can be primed and coated with at least two coats of oil-base paint on the inside and outside. (If capitals are allowed to gather moisture before painting, peeling is likely to occur and further coating will be futile.) Ornamental Capitals are shipped with a load-bearing plug, which must bear the weight of any load on the column. Specifications and materials subject to change without notice.

All Ornamental Capitals ship FOB Factory—freight is the responsibility of customer.



Exterior and paint-grade interior columns feature polyurethane or fiberglass Caps & Bases (see charts) to provide crisp, true architectural detail and increased durability. (Special-order wood Caps & Bases are available.) Optional aluminum plinths provide an extra measure of protection.

GREEK DORIC-400

The distinguishing characteristic of the Greek Doric Order is the absence of a base and the height of the column in relationship to its diameter. When used in true architectural proportions, the height of the column, including capital is five and one-half diameters. Greek Doric columns in antiquity are found on the Parthenon in Athens.






Residence—
San Francisco,
California
Greek Doric
Column with
Greek Doric Cat

- 2 Residence—
 San Francisco,
 California
 Greek Doric
 Column with
 Greek Doric Cap
- 3 Residence—
 San Francisco,
 California
 Greek Doric
 Column with
 Greek Doric
 Cap and deep
 column notching

Gre	ek Doric T	apered Sha	ft	Flutir	ng Specs						Greek Doric (Гар		
Outside	Dia.	Insi	de Dia.	No.	Width	N	lotch	Ring	Detail	Round	Total	Aba	acus	Total
Bottom	Top	Bottom	Top			A	В	No.	C	D	C-D	E	F	C-E
6"	5"	2-1/4"	2"	20	15/16"	1/16"	7/16"	3	9/16"	I-I/8"	1-11/16"	Ι"	7-3/8"	2-11/16"
8"	6-1/2"	4-1/4"	3-1/2"	20	1-1/4"	1/16"	13/16"	3	9/16"	1-1/4"	1-13/16"	1-1/2"	9-1/4"	3-5/16"
10"	8-1/4"	6-3/8"	5-1/4"	20	1-9/16"	1/16"	1-3/16"	3	9/16"	1-1/2"	2-1/16"	1-7/8"	11-5/8"	3-15/16"
12"	9-3/4"	7-7/8"	6-3/4"	20	1-7/8"	1/8"	1-1/4"	4	3/4"	I-7/8"	2-5/8"	2-1/4"	13-3/4"	4-7/8"
14"	11-1/4"	10-1/8"	8-1/4"	20	2-3/16"	1/8"	1-5/8"	4	3/4"	2-1/8"	2-7/8"	2-5/8"	16"	5-1/2"
16"	12-3/4"	11-1/16"	9-3/4"	20	2-1/2"	1/8"	1-7/8"	4	3/4"	2-3/8"	3-1/8"	2-7/8"	18-1/8"	6"
18"	14-1/2"	12"	11-1/2"	20	2-13/16"	1/8"	2-1/4"	4	3/4"	2-3/4"	3-1/2"	3-1/4"	20-1/2"	6-3/4"
20"	16"	14-1/4"	13"	20	3-1/8"	3/16"	2-5/8"	4	3/4"	3"	3-3/4"	3-5/8"	22-5/8"	7-3/8"
22"	18"	16-1/4"	15"	20	3-7/16"	3/16"	2-5/8"	5	Ι"	3-1/4"	4-1/4"	4"	25-1/4"	8-1/4"
24"	19-1/2"	18-1/4"	16-1/2"	20	3-3/4"	3/16"	3"	5	Ι"	3-1/2"	4-1/2"	4-3/8"	27-1/8"	8-7/8"

DORIC INTERCOLUMNIATION

Greek Doric Columns are available in fluted or unfluted versions. They may be ordered in Vignola's architectural proportions as described above or in custom combinations of column lengths and widths as well as in non-tapered cylinders.

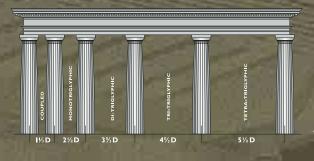

TUSCAN-600

The distinguishing characteristic of the Tuscan Order is simplicity. When used in true architectural proportions, the height of the column, including capital and base, is seven diameters. Tuscan columns in antiquity are found on the Temple of Piety in Rome.







- Country Club— Redding, California Tuscan Column with Tuscan Cap & Base
- 2 Residence—
 Medford,
 Oregon
 Tuscan Column
 with Tuscan
 Cap & Base
- 3 Art Gallery—
 Orange,
 California
 Solid-stave
 Mahogany
 Tuscan Column
 with Tuscan
 Cap & Base

		1.01.6		FL d										T (
	Tuscan Tap				ng Specs				Tuscan Bas					Tuscan Ca		
Outsid	e Dia.	Inside	Dia.	No.	Width	Plir	nth	Base Mo	olding	Total		Round	Echinus	Aba	ıcus	Total
Bottom	Top	Bottom	Top			Α	В	C	D	B-D	E	F	G	Н	- 1	G-H
4 "	3-1/4"	0"	0"	18	7/16"	5-3/8"	Ι"	13/16"	1/2"	2-5/16"	3/8"	1-1/4"	1/2"	11/16"	5-1/8"	1-3/16"
6 "	4-3/4"	3"	2-1/2"	24	1/2"	8"	1-1/2"	1-1/4"	1/2"	3-1/4"	1/2"	1-1/4"	3/4"	1"	7-1/2"	1-3/4"
► 8"	6-1/2"	5-1/4"	4-3/8"	24	11/16"	10-3/4"	1-7/8"	1-3/4"	5/8"	4-1/4"	1/2"	1-1/4"	1"	1-3/8"	9-3/8"	2-3/8"
► 10"	8-1/2"	7-1/4"	6-3/8"	24	7/8"	13-3/8"	2-3/8"	2-1/8"	3/4"	5-1/4"	3/4"	1-7/8"	1-1/4"	1-3/4"	12-1/8"	3"
► I2"	10"	9"	7-3/4"	24	Ι"	16-1/8"	2-3/4"	2-3/8"	7/8"	6"	3/4"	1-7/8"	1-3/8"	2"	14-3/8"	3-3/8"
► I4"	12"	10-1/8"	9"	24	1-1/4"	18-3/4"	3-3/8"	3"	1"	7-3/8"	Ι"	3"	1-5/8"	2-3/8"	17-1/8"	4"
I5 "	12-3/4"	11-1/16"	10"	24	1-11/32"	20-1/8"	3-5/8"	3-3/16"	1-1/16"	7-7/8"	1"	3"	1-3/4"	2-9/16"	18-3/16"	4-5/16"
l6 "	13-1/2"	12"	10"	24	1-7/16"	21-1/2"	3-7/8"	3-3/8"	1-1/8"	8-3/8"	1"	3"	1-7/8"	2-3/4"	19-1/4"	4-5/8"
► 18"	15"	14-1/4"	12"	24	1-1/2"	24-1/4"	4-1/4"	3-7/8"	1-1/2"	9-5/8"	1-1/4"	2-3/4"	2-1/8"	3"	21-1/2"	5-1/8"
▶ 20"	17"	16-1/4"	13"	24	1-11/16"	27"	4-3/4"	4-1/4"	1-3/4"	10-3/4"	1-1/4"	2-3/4"	2-1/4"	3-3/8"	24-1/4"	5-5/8"
▶ 22"	18-1/2"	18-1/4"	15"	24	1-15/16"	29-3/4"	5-1/4"	4-3/4"	2-1/8"	12-1/8"	1-1/2"	4-3/4"	2-1/2"	3-3/4"	26-1/2"	6-3/8"
≥ 24"	20"	20-1/4"	17"	24	2-1/8"	32-1/2"	5-3/4"	5-1/4"	2-1/4"	13-1/4"	1-1/2"	4-3/4"	2-3/4"	4-1/8"	28-3/4"	6-7/8"
≥ 26"	22"	22-1/8"	19"	24	2-1/4"	35"	6-1/4"	5-5/8"	2-5/8"	14-1/2"	1-1/2"	4-3/4"	3"	4-3/8"	31-1/2"	7-3/8"
▶ 28"	23-1/2"	24-1/8"	21"	24	2-11/16"	38"	6-3/4"	6"	2-3/4"	15-1/2"	1-1/2"	4-3/4"	3-1/4"	4-3/4"	33-3/8"	8"
▶ 30"	25"	26-1/4"	22"	24	2-7/8"	40-1/2"	7-1/4"	6-1/2"	2-3/4"	16-1/2"	1-1/2"	4-3/4"	3-1/2"	5-1/8"	35-3/4"	8-5/8"
▶ 32"	27"	27"	23"	24	3"	42-3/4"	7-3/4"	6-7/8"	3-1/8"	17-3/4"	2"	5-3/4"	3-3/4"	5-1/2"	37-5/8"	9-1/4"
▶ 34"	28-1/2"	29"	24-1/2"	24	3-1/4"	45-1/2"	8-1/2"	7-1/2"	3-3/8"	19-3/8"	2"	5-3/4"	3-7/8"	5-3/4"	41"	9-5/8"
36 "	30"	31"	26"	24	3-1/4"	48"	9"	7-3/4"	3-5/8"	20-3/8"	2"	5-3/4"	4-1/4"	6-1/4"	42-3/4"	10-1/2"


► Polyurethane Caps & Bases ► Fiberglass Caps & Bases

G

D ↓ C B


TUSCAN INTERCOLUMNIATION

Tuscan Columns are available in fluted or unfluted versions. They may be ordered in Vignola's architectural proportions as described above or in custom combinations of column lengths and widths as well as in non-tapered cylinders.

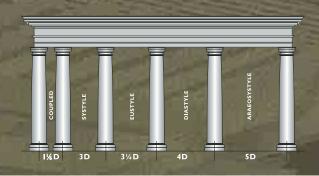

ROMAN DORIC-800

The Roman Doric order features an increase of decorative molding over the Tuscan Order. Vignola's Denticulated Doric Cap has a stepped, three-fillet support of the echinus instead of the single-fillet support of the Tuscan Order. The Doric base is similar to the Tuscan, but the addition of bead above the torus molding is an elegant embellishment. According to Vignola, the height of the Doric Column including cap and base should be eight diameters. Vignola Denticulated Doric is imitated closely from the Theater of Marcellus.

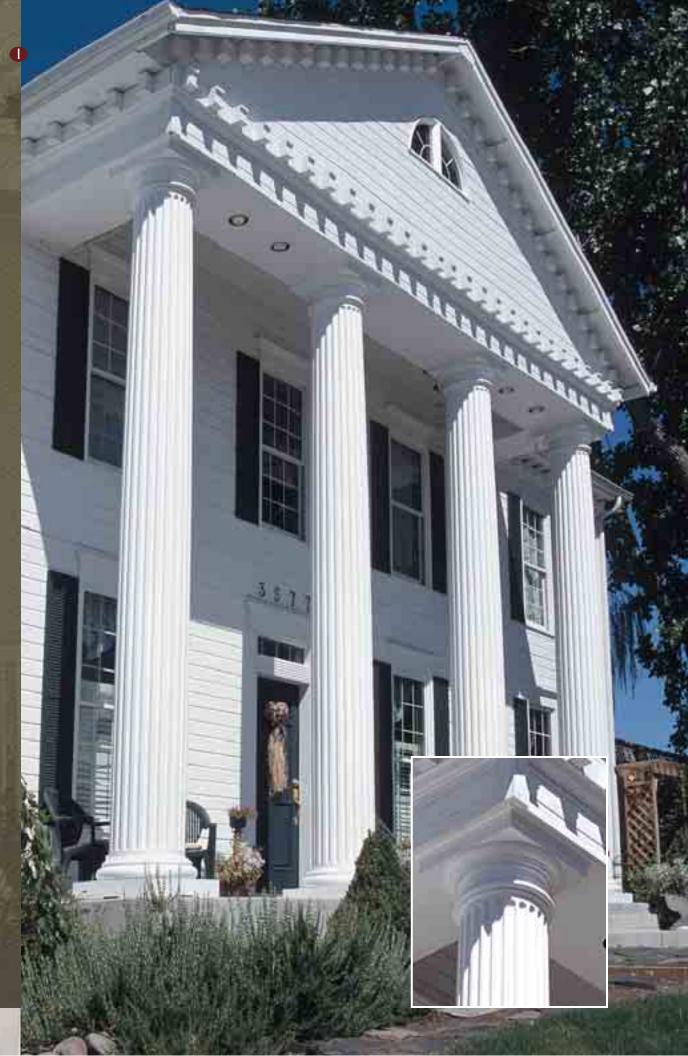



Residence—
Medford, Oregon
Roman Doric
Column with
Doric Cap
& Base

Residence—
Medford, Oregon
Solid-stave
Red Oak Roman
Doric Columns
with Doric Bases


3 Church— Fresno, California Roman Doric Column with Doric Cap

Ro	man Doric	Tapered Sh	naft	Fluti	ng Specs			Roman Dori	c Base					Roman Do	oric Cap		
Outsi	de Dia.	Insi	de Dia.	No.	Width	Pli	nth	Base 1	1olding	Total		Round	Echinus		Abacus		Total
Bottom	Тор	Bottom	Тор			Α	В	С	D	B-D	E	F	G	Н	I	J	G-I
6 "	4-3/4"	3"	2-1/2"	24	1/2"	8"	1-1/2"	Ι"	3/4"	3-1/4"	1/2"	1-1/4"	3/4"	3/4"	1/2"	7-1/2"	2"
▶ 8"	6-1/2"	5-1/4"	4-3/8"	24	11/16"	10-3/4"	1-7/8"	1-7/16"	15/16"	4-1/4"	1/2"	1-1/4"	1-1/8"	7/8"	5/8"	9-3/4"	2-5/8"
10"	8-1/2"	7-1/4"	6-3/8"	24	7/8"	13-3/8"	2-3/8"	1-3/4"	1-1/4"	5-3/8"	3/4"	1-7/8"	1-3/8"	- 1"	3/4"	12-1/2"	3-1/8"
12 "	10"	9"	7-3/4"	24	Ι"	16-1/8"	2-3/4"	2-1/16"	1-3/8"	6-3/16"	3/4"	1-7/8"	1-5/8"	1-1/2"	7/8"	14-3/4"	4"
14"	12"	10-1/8"	9"	24	1-1/4"	18-3/4"	3-3/8"	2-3/8"	1-5/8"	7-3/8"	1"	3"	1-15/16"	1-5/8"	1-1/8"	17-1/2"	4-11/16"
15 "	12-3/4"	11-1/16"	10"	24	1-11/32"	20-1/8"	3-5/8"	2-5/8"	1-13/16"	8-1/16"	1"	3"	2-3/32"	1-3/4"	1-13/16"	18-11/16"	5-1/32"
► 16"	13-1/2"	12"	10"	24	1-7/16"	21-1/2"	3-7/8"	2-7/8"	2"	8-3/4"	- 1"	3"	2-1/4"	1-7/8"	1-1/4"	19-7/8"	5-3/8"
► 18"	15"	14-1/4"	12"	24	1-1/2"	24-1/4"	4-1/4"	3-1/4"	2-3/8"	9-7/8"	1-1/4"	2-3/4"	2-1/2"	2-1/8"	1-3/8"	22-1/4"	6"
20 "	17"	16-1/4"	13"	24	1-11/16"	27"	4-3/4"	3-5/8"	2-5/8"	11"	1-1/4"	2-3/4"	2-3/4"	2-3/8"	1-5/8"	25"	6-3/4"
22 "	18-1/2"	18-1/4"	15"	24	1-15/16"	29-3/4"	5-1/4"	3-7/8"	2-7/8"	12"	1-1/2"	4-3/4"	3"	2-5/8"	1-3/4"	27-3/8"	7-3/8"
24 "	20"	20-1/4"	17"	24	2-1/8"	32-1/2"	5-3/4"	4-5/16"	3-3/16"	13-1/4"	1-1/2"	4-3/4"	3-5/16"	2-3/4"	1-3/16"	29-3/4"	7-15/16"
26 "	22"	22-1/8"	19"	24	2-1/4"	35"	6-1/4"	4-5/8"	3-1/2"	14-3/8"	1-1/2"	4-3/4"	3-9/16"	3-1/8"	2"	32-1/2"	8-11/16"
▶ 28"	23-1/2"	24-1/8"	21"	24	2-11/16"	38"	6-3/4"	5"	3-5/8"	15-3/8"	1-1/2"	4-3/4"	3-7/8"	3-3/8"	2-1/8"	34-5/8"	9-3/8"
▶ 30"	25"	26-1/4"	22"	24	2-7/8"	40-1/2"	7-1/4"	5-3/8"	4"	16-5/8"	1-1/2"	4-3/4"	4-1/16"	3-1/2"	2-3/8"	37"	9-15/16"
▶ 32"	27"	27"	23"	24	3"	42-3/4"	7-3/4"	5-3/4"	4-1/4"	17-3/4"	2"	5-3/4"	4-5/16"	3-3/4"	2-1/2"	39-1/4"	10-9/16"
▶ 34"	28-1/2"	29"	24-1/2"	24	3-1/4"	45-1/2"	8-1/2"	6-1/8"	4-5/8"	19-1/4"	2"	5-3/4"	4-11/16"	4"	2-5/8"	42-1/8"	11-5/16"
▶ 36"	30"	31"	26"	24	3-1/4"	48"	9"	6-3/8"	4-7/8"	20-1/4"	2"	5-3/4"	5"	4-1/4"	2-3/4"	44-1/8"	12"
D. I	4h C	0 D	► Filtrands	_	. 0 D												

[►] Polyurethane Caps & Bases ► Fiberglass Caps & Bases

ROMAN DORIC INTERCOLUMNIATION

Roman Doric Columns are available in fluted or unfluted versions. They may be ordered in Vignola's architectural proportions as described above or in custom combinations of column lengths and widths as well as in non-tapered cylinders.

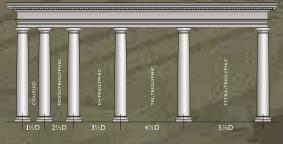

The distinguishing features of the lonic Order are the scrolls that decorate the capital of the column. These scrolls derived their intriguing shape from the shell of the Nautilus. The most common representations
of the lonic Order
include columns
with 24 flutes
separated by fillets
that are about one-third their width. Ionic shafts are placed on decorative Attic Bases. Customarily, the Ionic Order column height including capital and base is nine diameters. A prime example of the lonic Order as it was used in Rome is the Temple of Fortuna Virilis.





Residence— Medford, Oregon **Ionic Columns** with Greek Erectheum Caps and Attic Bases

Residence— Hartsville. Tennessee Ionic Columns with Scamozzi Cabs and Attic Bases

3 Residence— Medford, Oregon Solid-stave White Oak Ionic Columns with Temple of Winds Cap



Ionic Tapered Shaft Attic Base Fluting Specs Ionic Cap Outside Dia. Inside Dia. Width Plinth Base Molding Base Height Height Abacus Scroll **Bottom** B-F Н Top Bottom 4-3/4" 2-1/2" 24 1/2" 8" Ι" 3/4" 3/4" 1/2" 1/2" 3-1/2 2-1/4" 6-1/8" 8-1/16" 8" 6-1/2 5-1/4' 4-3/8 24 11/16 10-3/4" 1-7/8 1-1/8 7/8' 3/4' 1/2" 5-1/8' 8-1/4" 10-1/2 10" 7-1/4' 7/8" 5/8' 8-1/2' 6-3/8" 24 7/8" 13-3/8" 2-3/8" 1-1/4' 1-1/8" 6-1/4" 3-5/8' 11" 13-1/2 12" 10" 7-3/4" 24 16-1/8" 2-3/4" 1-1/2" 1-3/8" 7-1/4" 4-1/2" 12-1/2" 16-1/2" 12" 10-1/8 1-1/4" 1-1/4" 14' 3-3/8' 9' 18-3/4" 1-3/4" 1-5/8" 3/4" 8-3/4 5-1/2' 17-1/2 24 73' 15' 12-3/4 11-7/16 10" 24 1-11/32' 20-1/8" 3-5/8' 1-15/16 1-3/4" 1-5/16 13/16 9-7/16 6-1/8' 17-1/2 22" 16" 13-1/2" 12" 10" 1-7/16" 21-1/2" 3-7/8" 2-1/8" 1-7/8" 1-3/8" 7/8" 10-1/8" 6-1/8" 17-1/2" 22" 24 18" 15" 14-1/4" 12" 24 1-1/2" 24-1/4" 4-1/4" 2-3/8" 2-1/8" 1-1/2" 1-1/8" 11-3/8" 6-1/2" 20" 24-1/4" 20' 17" 16-1/4" 13" 24 1-11/16 27" 4-3/4 2-5/8 2-3/8 1-3/4' 1-3/8 12-7/8' 7-5/8' 25" 27-1/2 18-1/4" 15" 8-3/4" 25" 22" 1-15/16" 18-1/2 29-3/4 5-1/4 2-7/8' 2-5/8" 1-7/8" 1-5/8 14-1/4" 31-3/4 24 24" 20" 20-1/4" 17" 24 2-1/8" 32-1/2" 5-3/4" 3-3/16" 2-7/8" 2-1/8" 1-3/4" 15-11/16" 9" 25-1/4' 33" 26' 22" 22-1/8" 19" 74 2-1/4 35" 6-1/4 3-3/8 3-1/8' 2-1/4 1-7/8 16-7/8" 9-1/2" 26-1/2" 33-3/4' 21" 28" 23-1/2" 24-1/8" 24 2-11/16" 38" 6-3/4" 3-3/4" 3-3/8' 2-3/8" 1-7/8" 18-1/8" 12-1/2" 32" 40-1/4" 30" 25" 26-1/4" 22" 24 2-7/8" 40-1/2" 7-1/4" 3-7/8" 3-5/8" 2-5/8" 1-7/8" 19-1/4" 12-1/2" 32" 40-1/4"


G

FΕ

D C В

IONIC INTERCOLUMNIATION


Ionic Columns are available in fluted or unfluted versions. They may be ordered in Vignola's architectural proportions as described above or in custom combinations of column lengths and widths as well as in non-tapered cylinders.

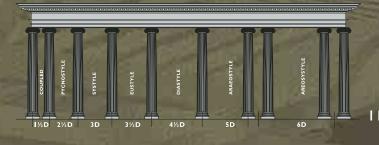

[▶] Polyurethane Caps & Bases ▶ Fiberglass Caps & Bases

CORINTHIAN-1000

Columns of the Corinthian Order are crowned with an inverted bellshaped capital. The capital is richly adorned with Acanthus leaves. Like the lonic, the Corinthian column exhibits 24 flutes and an Attic Base. The height of Corinthian columns, including capital and base, is ten diameters. This is a common Roman order that was used on the Temple of Mars Ultor.

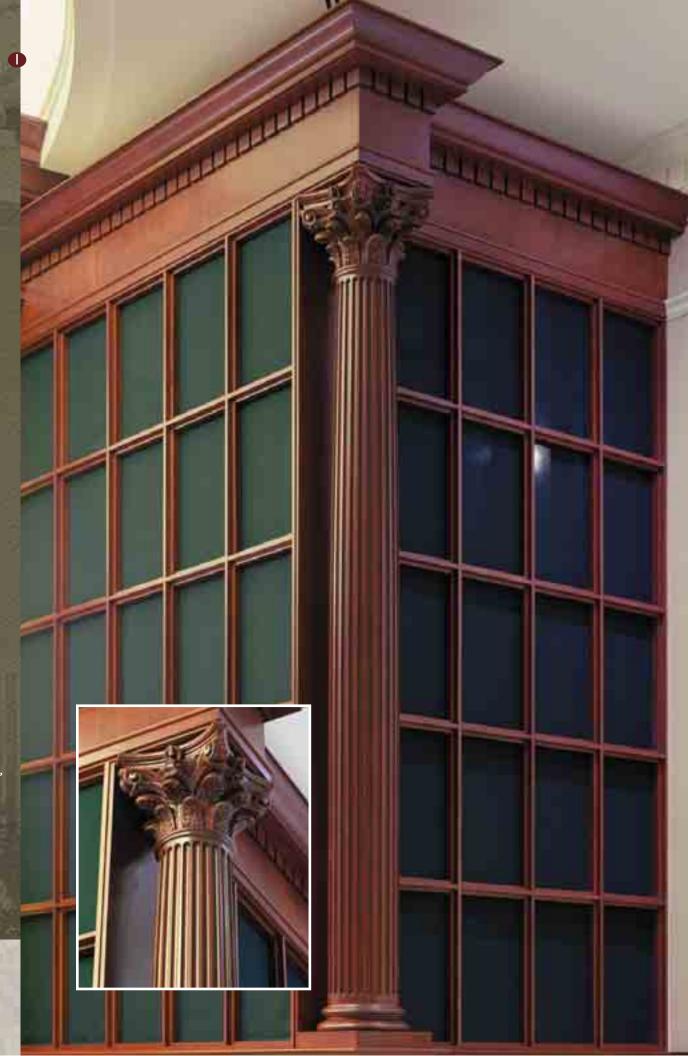



Saint James
Church—
Basking Ridge,
New Jersey
Corinthian
Column with
Corinthian
Cap and
Attic Base

Residence-Nashville, Tennessee Corinthian Columns


	Co	orinthian Ta	pered Shaf	t	Flutir	ng Specs			Attic	Base				Corinthia	n Cap
	Outside	Dia.	Inside	Dia.	No.	Width	Plir	nth		Base M	olding		Base Height	Height	Width
	Bottom	Тор	Bottom	Top			Α	В	C	D	Ē	F	B-F	G	Н
-	6"	4-3/4"	3"	2-1/2"	24	1/2"	8"	Ι"	3/4"	3/4"	1/2"	1/2"	3-1/2"	7"	9-1/2"
-	8"	6-1/2"	5-1/4"	4-3/8"	24	11/16"	10-3/4"	1-7/8"	1-1/8"	7/8"	3/4"	1/2"	5-1/8"	10-1/4"	12-3/4"
-	10"	8-1/2"	7-1/4"	6-3/8"	24	7/8"	13-3/8"	2-3/8"	1-1/4"	1-1/8"	7/8"	5/8"	6-1/4"	12"	15"
-	12"	10"	9"	7-3/4"	24	Ι"	16-1/8"	2-3/4"	1-1/2"	1-3/8"	Ι"	5/8"	7-1/4"	15-1/2"	18-1/2"
-	14"	12"	10-1/8"	9"	24	1-1/4"	18-3/4"	3-3/8"	1-3/4"	1-5/8"	1-1/4"	3/4"	8-3/4"	17"	22"
-	15"	12-3/4"	11-1/16"	10"	24	1-11/32"	20-1/8"	3-5/8"	1-15/16"	1-3/4"	1-5/16"	13/16"	9-7/16"	17"	22"
•	16"	13-1/2"	12"	10"	24	1-7/16"	21-1/2"	3-7/8"	2-1/8"	1-7/8"	1-3/8"	7/8"	10-1/8"	20"	27"
•	18"	15"	14-1/4"	12"	24	1-1/2"	24-1/4"	4-1/4"	2-3/8"	2-1/8"	1-1/2"	1-1/8"	11-3/8"	23"	32-1/2"
•	20"	17"	16-1/4"	13"	24	1-11/16"	27"	4-3/4"	2-5/8"	2-3/8"	1-3/4"	1-3/8"	12-7/8"	25-1/2"	39"
•	22"	18-1/2"	18-1/4"	15"	24	1-15/16"	29-3/4"	5-1/4"	2-7/8"	2-5/8"	1-7/8"	1-5/8"	14-1/4"	28-1/2"	42"
•	24"	20"	20-1/4"	17"	24	2-1/8"	32-1/2"	5-3/4"	3-3/16"	2-7/8"	2-1/8"	1-3/4"	15-11/16"	28-1/2"	42"
•	26"	22"	22-1/8"	19"	24	2-1/4"	35"	6-1/4"	3-3/8"	3-1/8"	2-1/4"	1-7/8"	16-7/8"	32"	42"
•	28"	23-1/2"	24-1/8"	21"	24	2-11/16"	38"	6-3/4"	3-3/4"	3-3/8"	2-3/8"	1-7/8"	18-1/8"	34"	46"
•	30"	25"	26-1/4"	22"	24	2-7/8"	40-1/2"	7-1/4"	3-7/8"	3-5/8"	2-5/8"	1-7/8"	19-1/4"	37-1/2"	46-1/2"

[►] Polyurethane Caps & Bases ► Fiberglass Caps & Bases


В

CORINTHIAN INTERCOLUMNIATION


Corinthian Columns are available in fluted or unfluted versions. They may be ordered in Vignola's architectural proportions as described above or in custom combinations of column lengths and widths as well as in non-tapered cylinders.

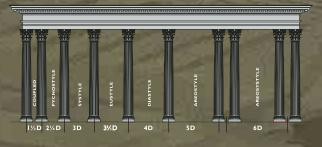

Column Splitting

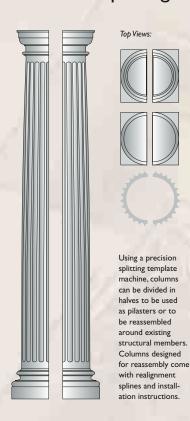


Stave Thicknesses



Shaft Diameter	Unfluted	Fluted
6"	1-1/2"	1-1/2"
8"	1-1/2"	1-1/2"
10"	1-1/2"	2"
12"	1-1/2"	2"
14"	2"	2"
16"	2"	2"
18"	2"	2"
20"	2"	2"
22"	2"	3"
24"	2"	3"
26"	2"	3"
28"	2"	3"
30"	2"	3"
32"	3"	3-1/2"
34"	3"	3-1/2"
36"	3"	3-1/2"

Plan Types

Turncraft Columns are available in the following plan types. Please specify when

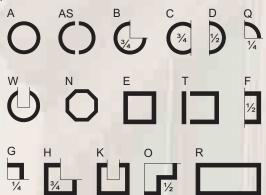


Calculated Safe-Load Capacities

Shaft Dia.	Pine	Redwood	Shaft Dia.	Pine	Redwood
6"	2,567	5,146	22"	18,426	24,212
8"	4,114	7,646	24"	20,018	26,272
10"	5,497	10,474	26"	22,252	36,870
12"	6,620	12,535	28"	24,001	39,519
14"	11,017	15,282	30"	25,746	42,169
16"	12,307	17,343	32"	42,080	55,317
18"	14,487	19,404	34"	44,567	57,476
20"	16,688	22,151	36"	47,054	61,794
	,			17,031	01,771

The sample columns tested supported loads at least four times the calculated value above prior to failure. The load was applied concentrically through the axis of the column. Loads shown are valid only if there is uniform contact between the full area of column ends and the Cap & Base units. Loads are provided for your convenience only and are not exact values. Consult a structural engineer for the most-accurate load estimates.

Superposition

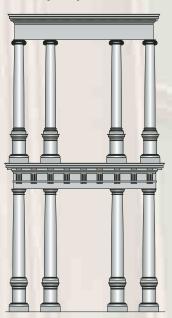

The view of Renaissance authority Scamozzi was that the lower diameter of a top column should equal the upper diameter of the column underneath. The superior order should always be placed over the inferior, that is Corinthian over Ionic, Doric, Tuscan. The more slender and elegant orders should be placed over the stockier and more solidly built if a top-heavy design is not desired. An ancient example of this descending order is the Colosseum in Rome, which has at least four stories of superpositioned orders.

Architectural Specifications

I.I PRODUCT DESCRIPTION

- A. Column shaft shall be standard glued stave construction by Turncraft according to Design No. (400) (600) (800) (900) (1000)
- B. Column will have the correct proportions based on orders of classical architecture.
- (Redwood) (Red Oak) (Poplar) (Hard Maple) (Western Pine) (Cherry) (Mahogany) (Black Walnut) (Western Red Cedar) (Other—Specify)

1.2 SUBMITTALS

- A. Submit Turncraft literature and shop drawings for customer approval
- B. Submit samples of _ . (Cap) (Base) (Column Shaft)

1.3 DELIVERY, STORAGE, AND INSTALLATION

- A. Storage and installation of shafts and Caps & Bases shall be according to manufacturer-supplied instructions.
- B. Columns must be stored in a dry, well-ventilated area that is not exposed to heat or sunlight.

1.4 WARRANTY

- A. Manufacturer shall furnish a 10-year limited warranty that its clear, Clear All-Heart Redwood columns with fiberglass Caps & Bases will be free of manufacturing defects, joint separation, and rotting.
- B. Manufacturer shall furnish a one-year limited warranty on all other wood species against manufacturing defects.

2.0 PRODUCTS

2.1 ACCEPTABLE MANUFACTURER:

A. Turncraft, P.O. Box 2429, White City, OR 97503 (541) 826-2911, (800) 423-3311

2.2 MATERIALS

- A. All glue joints are pressure-glued using Type-I waterproof glue and torque bands no more than 18" apart, with 90 to 100 pounds-per-square-inch pressure for a minimum of 24 hours
- B. Redwood/Cedar columns shall be factory primed with two coats of acrylic primer and hand sanded between coats. Redwood/Cedar columns for exterior use are to be coated internally with asphalt paint. Exterior Western Pine columns shall be treated with Woodtreat MB wood preservative.
- C. Capitals shall be flashed with sheet lead or equivalent.
- D. Ornamental Capitals shall be manufactured of composition plaster and fiberglass fibers. Capitals shall be sealed with an acrylic vinyl waterproofer.

Ε.	Plinths shall be made of	(Aluminum)	
	(High-Density Fiberglass)		
	/W	and) for interior	

- F. Square columns shall match specifications of round columns as stated in these architectural specifications.
- G. Column shafts shall be made of thickness finger-jointed stock. -inch nominal

3.0 EXECUTION

3.1 INSTALLATION


A. Follow manufacturer's detailed installation guidelines.

Project Planning

Turncraft has become the country's leading supplier of wood columns for residential and commercial applications, shipping columns to job sites daily from its East and West Coast warehouses. Architectural Columns can usually be shipped in four to six weeks from receipt of design specifications.

• (uantity	Desired:	


- Column Style: (Greek Doric) (Tuscan) (Roman Doric) (Ionic) (Corinthian)
- _(A) (B) (C) (D) (E) (F) (G) (H) (K) (L) (O) Plan Type:
- Shaft Type: (Round) (Square)
- · Profile: (Tapered) (Non-tapered)
- Bottom Shaft Diameter or Width:
- Overall Length:
- · Fluting: (Doric) (Ionic) (None)
- Wood Species: (Western Pine) (Redwood) (Poplar) (Red Oak) (Hard Maple) (Cherry) (Black Walnut) (Western Red Cedar) (Mahogany) (Other) Wood Species:
- Stave Construction: _ __ (Finger-jointed Staves) (Solid Staves)
- Usage: (Interior Paint-grade) (Interior Stain-grade) (Exterior Paint-grade)
- (New Construction) (Restoration Replacement) Proiect: (For Pilaster) (For Reassembly)
- Splitting:
- (Attic) (Roman Doric) (Tuscan) (Other) Bases: Capitals/Ornamentals:
- Capitals/Ornamentals: _____ (Roman Corinthian) (Émpire) (Greek Angular Ionic) (Temple of Winds) (Greek Erectheum) (Roman Ionic) (Roman Doric Ornamental) (Scamozzi) Capitals/Architectural: _____ (Greek Doric) (Roman Doric)
- (Tuscan) (Other)
- Cap & Base Materials: (Polyurethane) (Fiberglass) (Aluminum-Plinth Only) (Wood) (Other) outer services: _____ (Gutet)
 Interior) (Lead Flashing) (Asphalt Priming of Shaft
- Auditional Desired Items/Services: ______(Project Shop Drawings) (Samples—Caps, Bases, Shafts) (Other)

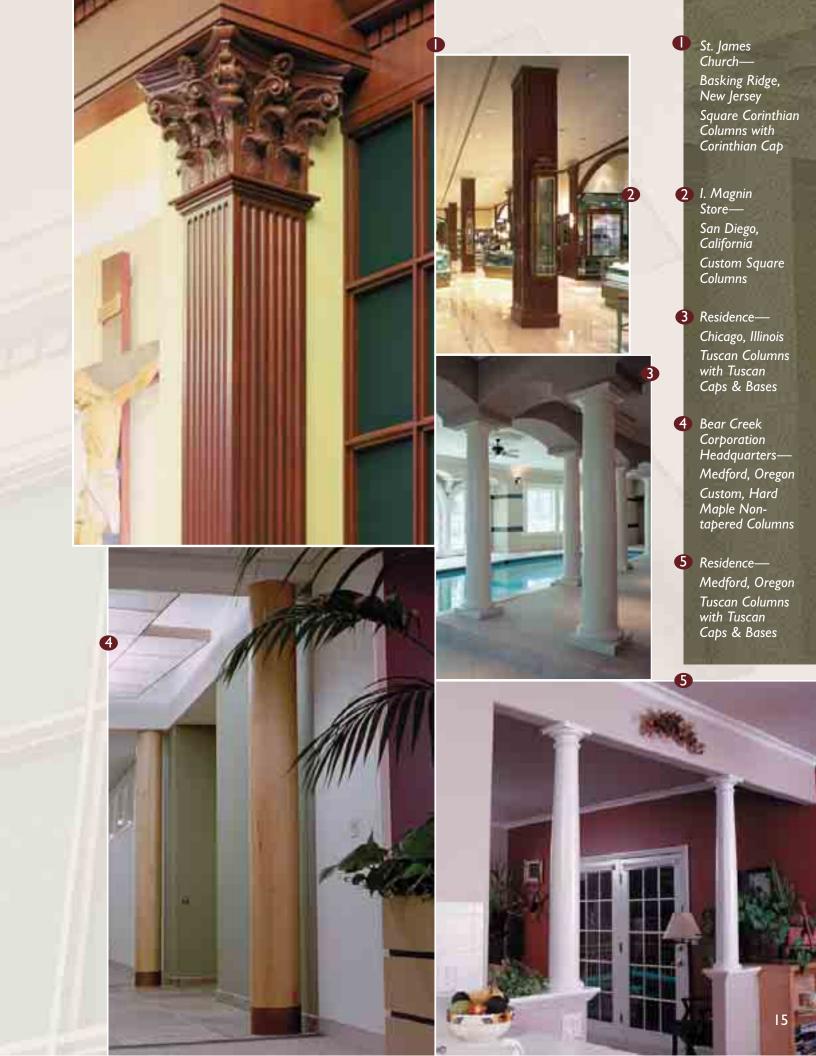

Traditional Craftsman Columns—Today's Technology

Born out of the understated, practical tradition of the early 1900s Arts and Crafts movement, the square tapered column

has become popular in modern adaptations of the Craftsman, Prairie, Bungalow, Country, and even Mission style homes of today. Poly-Classic® Craftsman Series Columns give builders and homeowners the opportunity to recapture the simple, honest artistry of yesterday's craftsmen with today's most advanced materials and construction techniques. They are offered in tapered and non-tapered, fluted, and raised panel styles.



Enjoy the aesthetics of architecturally proportioned columns with the benefits of fiberglass-reinforced polymer (FRP)— freedom from

the attacks of ants, termites, and fungi and from the effects of moisture, heat, and cold. Poly-Classic® Columns have the enduring characteristics of stone. Structurally, the single-piece, hollow Poly-Classic Columns are among the most versatile supports available. They come in fluted or unfluted Tuscan styling with matching Tuscan Caps & Bases as standard. Attic Bases and Ornamental Capitals are optional.

Ask for details about Turncraft's limited lifetime warranty.

The Aesthetic Alternative—Real Wood Accents

Select from a full range of practically priced fluted or unfluted Colonial Columns or traditional Porch and Lamp Posts to complete

your projects on time and within budget. Order column diameters from 6" to 24" and heights to 30'. Paint-grade Western Pine columns are ready for immediate delivery from distributors in all 50 states. Interior, stain-grade columns in a wide range of wood species are available by special order. Columns are shipped with high-density polyurethane Caps & Bases. Porch and Lamp Posts are available in 8', 9', and 10' heights and widths of 4", 5", and 6". They are turned from finger-jointed, kiln-dried western wood species.

Second



Information and specifications in this brochure are subject to change without notice.

P.O. Box 2429 • White City, Oregon 97503
Phone (541) 826-2911 • Fax (541) 826-1393
E-mail: info@turncraft.com
www.turncraftarchitectural.com

©2005 Turncraft Architectural
All rights reserved. Poly-Classic is a
registered trademark of Turncraft.
All other trademarks mentioned
herein are the property of their
respective owners.

Distributed by:

